

LEAF EATER ADVANCED™ RAIN HEAD

The Leaf Eater prevents debris from entering the Rainwater Harvesting System, improves water quality and reduces tank maintenance. All of which are undesirable elements to have in a water storage system.

The single screen deflects leaves and debris away from the flow of water. This minimises maintenance and enhances catchment efficiency. This Rain Head incorporates a VH Pivot™ outlet that swivels to suit vertical or horizontal downpipes.

The Leaf Eater Advanced™ can also be used as a debris removing device even when rainwater is not being collected.




Rain  Harvesting™

FEATURES & BENEFITS


- Compact, versatile rainhead for quick and easy installation.
- Patented single screen technology for advanced debris shedding.
- Minimal Maintenance
- Pivot the outlet to suit vertical or horizontal (rear outlet) downpipes – variety of installation options in one product
- High flow rate performance.
- Superior catchment efficiency at low and high flow rates.
- Single Screen with mosquito proof stainless steel mesh.
- Available in 90mm or 100mm outlet.

MAINTENANCE

- The Clean Shield screen is mostly self cleaning.
- If cleaning is required, simply lift the Clean Shield outwards, then hose or brush off.

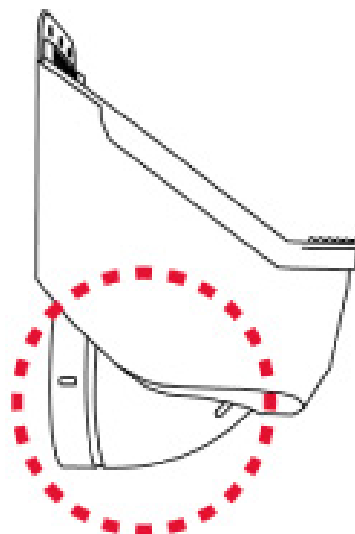


Horizontal Position

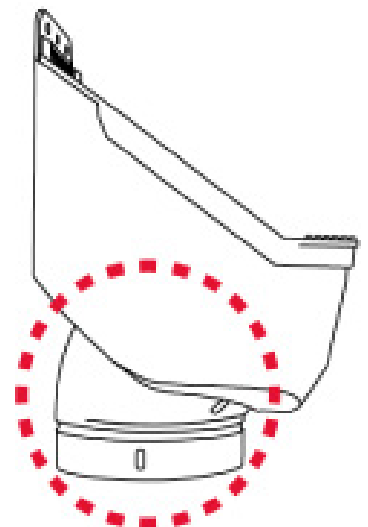

Vertical Position

GUTTER & MID-MOUNT INSTALLATION

- 1** Gutter: Measure 208mm from the bottom of the existing gutter pop and remove this section of downpipe. Ensure the cut edge is clean and smooth. Mid-Mount: Remove 208mm of downpipe where the Leaf Eater Advanced™ is to be situated. Ensure cut edges are clean and smooth. (figure 1)
- 2** Using the quick release tabs remove the Cleanshield™ screen by lifting it up and then out. (figure 2)
- 3** Insert the Leaf Eater Advanced™ by sliding it up over the cut section and then down into position. The Leaf Eater Advanced™ outlet should be slid firmly onto the bottom down pipe until it can be pushed no further. (figure 3)
- 4** Screw the Leaf Eater Advanced™ into position through the screw slots provided. Ensure appropriate screws and anchors (if required) are used. (figure 5)
- 5** Insert the Cleanshield™ into the Leaf Eater Advanced™. Ensure the Cleanshield™ screen is sitting firmly in place and check installation is secure. (figure 6)

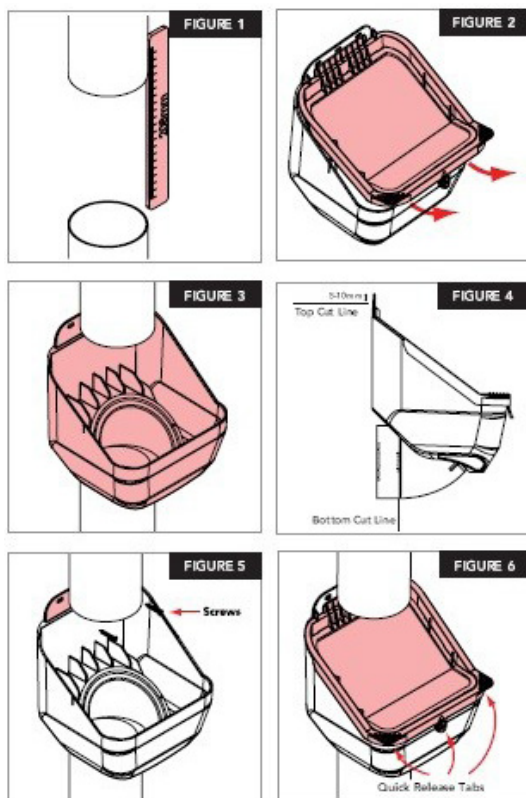

HORIZONTAL (REAR OUTLET INSTALLATION)

- 1** Using the quick release tabs remove the Cleanshield™ screen by lifting it up and out. (figure 2)
- 2** Swivel the outlet to the horizontal position - some force may be required.
- 3** Position the Leaf Eater Advanced™ next to existing pipework, mark and cut top and bottom cut lines as per figure 4. Ensure the cut edge is clean and smooth.
- 4** Insert the Leaf Eater Advanced™ by sliding the rear outlet into the horizontal pipe. The back fixing pipe must sit behind the top section of downpipe. (figure 3).
- 5** Screw the Leaf Eater Advanced™ into position through the screw slots provided. Ensure appropriate screws and anchors (if required) are used. (figure 5)
- 6** Insert the Cleanshield™ screen into the Leaf Eater Advanced™. Ensure the Cleanshield™ screen is sitting firmly in place and check installation is secure. (figure 6)

