



Product Catalogue

October 2025

JoJo quality commitment

We invest in designs, technologies and capabilities that uphold our purpose.

JoJo's popular water tanks comply with the national tank standard for water tanks, SANS 1731:2017 at all eight of our operations, and come with a 40-year-plus track record and 10-year warranty. Each JoJo tank is a quality, long-term investment designed to serve a purpose and add value.



UV-stabilised outer laver withstands the harsh African climate



Black inner layer prevents algae growth



BPA-free, food-grade layer prevents leaching of harmful chemicals and protects the quality of the water stored



No vertical joints or weak points in the layers for added strength



Greater thickness at the bottom of the tank provides the required strength to withstand the pressure from the liquid stored



Closely spaced ribs at the bottom of the tank provides added strength



Lids are secured with spring-loaded e-clips as an additional safety measure in the event that the tank overflows



Tanks are supplied with high-quality, practical fittings designed for use with our accessory range, to extend the versatility and allow for easy DIY installations



Tanks can be manufactured in a range of colours to suit various preferences and unique aesthetic requirements



Our colour pigments have the best weather -and light fastness properties for extended outdoor use without fading



Iconic contemporary design with unique sharp lines and finishes



Water tank colour range



















Product warranties, lead times and availability

Colour Range

Water Tanks























Sandstone*

Chemical Tanks







Natural White

* Actual colours may vary ** Available at a 10% premium

Our products can be made in any of the above colours subject to practical terms and conditions.

Stock & Non-Stock Items



This icon indicates that a product is carried in stock with a 7 calendar day lead time, subject to delivery constraints.



This icon indicates a product that is non-stock ie. made to order and has a 14 calendar day lead time, subject to delivery constraints.



This icon indicates that a product can only be ordered as a special order, and availability/lead time will then have to be confirmed with the relevant branch.

Product Warranties

Quality is of utmost importance to us, that is why each of our products comes with a quality warranty. The various warranty periods can be identified by the following badges:







Contact Us

National Support Shared Service Centre Groblersdal Pretoria Camperdown **East London** Glencoe Bloemfontein Uitenhage Worcester

Phone

+27 (0) 861JOJOSA +27 (0) 11 695 8300 +27 (0) 13 262 7900 +27 (0) 12 527 2600 +27 (0) 31 785 2962 +27 (0) 43 745 0028 +27 (0) 34 393 2807 +27 (0) 51 434 1398 +27 (0) 41 922 4248

+27 (0) 23 347 6533

Email

productinfo@jojo.co.za aden@jojo.co.za ronelle@jojo.co.za delmarieh@jojo.co.za

Vertical & Slimline Water Storage Tanks



TANK	SG	DIAMETER	HEIGHT	LID	CODE	AVAILABILITY	WARRANTY
260L	SG 1	670mm	940mm	480mm	260LT	S Stock	3-year
500L	SG 1	840mm	1 080mm	480mm	500	s Stock	3-year
500L Backwash	SG 1	840mm	1 080mm	480mm	500BW	NS Non-Stock	3-year
750L Slimline™	SG 1	760mm	1850mm	480mm	SLMB	s Stock	10-year
1000L	SG 1	1 110mm	1 300mm	480mm	1000	S Stock	10-year
1000L Slimline™	SG 1	840mm	2 060mm	480mm	1000SLMB	s Stock	10-year
1 000L SuperSlim	SG 1	400mm (width) 2 020mm (length)	1800mm	250mm Screw x 2	1000SSLM	NS Non-Stock	10-year
1 500L MultiSlim	SG 1	760mm (width) 1620mm (length)	1890mm	450mm Screw x 2	1500MSS	NS Non-Stock	10-year
1 500L	SG 1	1 410mm	1200mm	480mm	1500	s Stock	10-year
1800L	SG 1	1200mm	1 780mm	480mm	1800	s Stock	10-year
2 000L	SG 1	1 420mm	1 450mm	480mm	2000	S Stock	10-year
2 400L	SG 1	1 420mm	1 700mm	480mm	2400	s Stock	10-year
2 700L	SG 1	1 420mm	1860mm	480mm	2700	S Stock	10-year
2 500L MultiSlim	SG 1	760mm (width) 2 500mm (length)	1960mm	450mm Screw x 2	2500MSS	NS Non-Stock	10-year
4 750L	SG 1	1820mm	2 060mm	480mm	4750	S Stock	10-year
5 250L	SG 1	1820mm	2 255mm	480mm	5250	s Stock	10-year
5 500L	SG 1	1900mm	2 240mm	480mm	5500	Special Order	10-year
10 000L	SG 1	2 200mm	3 150mm	480mm	10000WA	s Stock	10-year
15 000L * **	SG 1	2 600mm	3 260mm	480mm	15000	NS Non-Stock	10-year
20 000L * **	SG 1	2 600mm	4 270mm	450mm Screw	20000	NS Non-Stock	10-year

Ideal to use for the harvesting of rain and greywater, or as a backup system during water shortages. These tanks require proper installation on a base or tank stand and need to remain stationary once full.

Standard Colours

Vertical Tanks

Slimline Tanks



JoJo Pump Solutions



BOOSTER PUMP	TOILET	IRRIGATION SYSTEM	ТАР	MAX HEAD	MAX FLOW
	[a]	PYRAMID SPRINKLER			
0.37kW Basic Booster Pump	1	1	1	30m (3Bar)	23L/min

1 2	IMPACT or	POP UP •	r MISTING				
·	1	2	10				
2			IU	Yes	Yes	38m (3.8Bar)	34L/min
	3-4	4-6	30	Yes	Yes	26m (2.6Bar)	100L/min
1	2	3	30	Yes	Yes	36m (3.6Bar)	40L/min
3	4	8	35	Yes	Yes	32m (3.2Bar)	100L/min
4	6	10	45	Yes	Yes	44m (4.4Bar)	120L/min
2	2	5	20	Yes	Yes	45m (4.5Bar)	66L/min
3	3	6	30	Yes	Yes	53m (5.3Bar)	75L/min
4	4	8	35	Yes	Yes	56m (5.6Bar)	150L/min
1	1	2	10	Yes	Yes	32m (3.2Bar)	75L/min
2	2	4	20	Yes	Yes	42m (4.2Bar)	75L/min
3	3	6	30	Yes	Yes	45m (4.5Bar)	91L/min
8	8	16	50	Yes	Yes	45m (4.5Bar)	233L/min
	4 2 3 4 1 2	3 4 4 6 2 2 3 3 4 1 1 2 2 3 3	3 4 8 4 6 10 2 2 5 3 3 6 4 4 8 1 1 2 2 2 4 3 3 6	3 4 8 35 4 6 10 45 2 2 5 20 3 3 6 30 4 4 8 35 1 1 2 10 2 2 4 20 3 3 6 30	3 4 8 35 Yes 4 6 10 45 Yes 2 2 5 20 Yes 3 3 6 30 Yes 4 4 8 35 Yes 1 1 2 10 Yes 2 2 4 20 Yes 3 3 6 30 Yes	3 4 8 35 Yes Yes 4 6 10 45 Yes Yes 2 2 5 20 Yes Yes 3 3 6 30 Yes Yes 4 4 8 35 Yes Yes 1 1 2 10 Yes Yes 2 2 4 20 Yes Yes 3 3 6 30 Yes Yes	3 4 8 35 Yes Yes 32m (3.2Bar) 4 6 10 45 Yes Yes 44m (4.4Bar) 2 2 5 20 Yes Yes 45m (4.5Bar) 3 3 6 30 Yes Yes 53m (5.3Bar) 4 4 8 35 Yes Yes 56m (5.6Bar) 1 1 2 10 Yes Yes 32m (3.2Bar) 2 2 4 20 Yes Yes 42m (4.2Bar) 3 3 6 30 Yes Yes 45m (4.5Bar)

Booster Pump to Tank Connector Kit (TCK01)



- Easy to use
- DIY-friendly
- All accessories included
- Great quality
- Suitable for use with our 0.37, 0.55, 0.6 and 0.75kW Booster Pumps

40mm Booster Pump to Tank Connector Kit



JoJo Booster Pump Flow Controller (PUMPFLOWC)



- Suited for use with JoJo's:
- 0.37kW Booster Pump
- 0.55, 0.75 & 1.1kW Centrifugal Pumps
- 0.6kW Self-priming Jet Pump

Page no. 4 Page no. 5

^{*} Transport costs apply ** 50% Deposit required to confirm order

JoJo **Pump Solutions**



JoJo Booster Pump PC Board

(PUMPPCB)





Suited for use with JoJo's:

- 0.37kW Booster Pump
- 0.55, 0.75 & 1.1kW Centrifugal Pumps
- 0.6kW Self-priming Jet Pump

0.55kW Centrifugal Pump (PUMPC0.55)

S 1-year Warranty



- Best efficiency pressure range 1.6 to 2.3 bar
- Best efficiency flow range 30 to 80lt/min

0.75kW VSD Booster Pump (PUMPVSD0.75)

S 1-year Warranty



- Best efficiency pressure range 2 to 3.5 bar
- Best efficiency flow range 13 to 40lt/min

0.37kW Basic Booster Pump & Connector Kit

(PUMPBC)

S 1-year Warranty



- Best efficiency pressure range 1 to 2.3 bar
- Best efficiency flow range 5 to 15lt/min

0.6kW Centrifugal Jet Pump (PUMPCO.6)

S 1-year Warranty



- Best efficiency pressure range 2 to 3 bar
- Best efficiency flow range 10 to 30lt/min

0.75kW Stainless Steel HVSD **Booster Pump**

(PUMPHMS0.75)

NS 1-year Warranty



- Best efficiency pressure range 2 to 4 bar
- Best efficiency flow range 28 to 56lt/min

0.37kW Booster Pump (PUMB)

S 1-year Warranty



- Best efficiency pressure range 1 to 2.4 bar
- Best efficiency flow range 10 to 20lt/min

0.75kW Centrifugal Pump (PUMPC0.75)

S 1-year Warranty



- Best efficiency pressure range 1.9 to 2.8 bar
- Best efficiency flow range 40 to 80lt/min

1.1kW Centrifugal Pump (PUMPC1.1)

S 1-year Warranty



- Best efficiency pressure range 2.7 to 3.5 bar
- Best efficiency flow range 40 to 90lt/min

1.2kW VSD Booster Pump (PUMPVSD1.2)

NS 1-year Warranty



Best efficiency pressure range 2.5 to 5.5 bar

Coming soon!

Best efficiency flow range 63 to 116lt/min

0.55kW 3" SDM Borehole **Pump Kit**

(PUMPKITBH0.55)

NS 1-year Warranty



- Best efficiency head range 46 to 84 bar
- Best efficiency flow range 20 to 40lt/min

0.55kW Smart Series Pump (PUMPSMARTO.55)

NS 1-year Warranty



- Best efficiency pressure range 1.5 to 3.4 bar
- Best efficiency flow range 25 to 58lt/min

1.5kW Stainless Steel HVSD **Booster Pump**

(PUMPHMS1.5)

NS 1-year Warranty



- Best efficiency pressure range 2 to 4.5 bar
- Best efficiency flow range 51 to 120lt/min

0.75kW 3" SDM Borehole **Pump Kit**

(PUMPKITBHO.75)

NS 1-year Warranty



- Best efficiency head range 59 to 107 bar
- Best efficiency flow range 20 to 40lt/min

0.75kW Smart Series Pump (PUMPSMARTO.75)

NS 1-year Warranty



- Best efficiency pressure range 2 to 3.4 bar
- Best efficiency flow range 39 to 67lt/min

0.37kW 3" SDM Borehole **Pump Kit**

(PUMPKITBH0.37)



- Best efficiency head range 33 to 60 bar
- Best efficiency flow range 20 to 40lt/min

0.37kW Smart Series Pump (PUMPSMARTO.37)

NS 1-year Warranty



- Best efficiency pressure range 1 to 2.2 bar
- Best efficiency flow range 25 to 58lt/min

1.1kW Smart Series Pump (PUMPSMART1.1)

NS 1-year Warranty



- Best efficiency pressure range 2 to 3.5 bar
- Best efficiency flow range 67 to 150lt/min

Page no. 6 Page no.7

JoJo Pump Solutions



JoJo Tank Accessories



PROTECT YOUR PUMP

JoJo Pump Cover (PUM)



JoJo Medium Pump Cover





- Extends the lifespan of your Booster Pump
- Reduces noise
- UV-resistant
- Corrosion-resistant
- Made with the best quality LLDPE
- Medium Pump Cover's extra height accommodates larger pumps or setups



Remote Tank Pump Controller





- S 1-year Warranty
- Wireless range of 4km line of sight
- Solar powered transmitter with lithium battery backup
- Tank water level displayed on the receiver
- Starts/stops the pump at different levels
- $oldsymbol{\circ}$ Additional safety parameters such as dry run and forced shutdown can be set
- Suited for use with booster pumps, borehole pumps and solenoid valves.

Available for both electric and solar pumps.

Conveniently monitor and control the water levels for remote tank installations with our Remote Tank Pump Controller. Supplied all-inclusive, this device consists of a solar-powered transmitter with water sensors that is installed on your tank, and an LED receiver that is connected to your pump to start and stop it at different levels.

Important: This device is suited for direct connection to 220V AC pumps of up to 3kW or connection to a 220/440V contactor for unlimited kW.

JoJo Monitor Tank Level (IOTLEVEL)







- Bluetooth Connectivity: Ideal for initial setup, testing, and real-time monitoring.
- Sigfox Integration: Enables remote monitoring, allowing you to track current and historical data, set alerts, and analyse water storage or consumption over specific periods.
- Wide Measuring Range: Accurately measures water levels ranging from 150mm to 5,000mm.
- Reliable: Engineered for consistent performance.
- Convenient: Pairs with our intuitive, user-friendly mobile app for an optimal water monitoring experience.

JoJo Monitor Water Meter (IOTMETER)



S 1-year Warranty



- Bluetooth Connectivity: Ideal for initial setup, testing, and real-time monitoring.
- Sigfox Integration: Enables remote monitoring, allowing you to track current and historical data, detect possible leaks and abnormal water flow, set alerts, and analyse water usage and flow rates over specific periods.
- Wide Measuring Range: Accurately measures water levels ranging from 150mm to 5,000mm.
- Reliable: Engineered for consistent performance.
- Convenient: Pairs with our intuitive, user-friendly mobile app for an optimal water monitoring experience.



IoT Device Lithium Batteries (IOTBATTERIES)

- High and stable operating voltage
- Low self-discharge
- Ompliant with IEC 86-4 safety standard

Now Available on our Online Store

Page no. 8 Page no. 9



JoJo **Tank Accessories**





DIY



JoJo Mechanical Tank Level Indicator (MTANKLEVEL)



- Supplied in Kit Form: Simplifies installation for your convenience.
- ▼ Wide Measuring Range: Accurately measures water levels up to 2,300mm, suitable for JoJo Slimline and vertical tanks up to 5.500 liters.
- Reliable: Simple yet effective design ensures dependable performance.
- Convenient: Easily see how much water is in your tank at a glance.
- Locally Manufactured: Designed to meet local needs and conditions.

Connected to your tank's overflow, this all-inclusive Mechanical Tank Level Indicator uses a reliable float ball system to monitor tank levels up to 2.3 meters. With all installation materials included, monitoring your tank's water level has never been easier!



DIY Slimline Tank Stand

(DIYSTANDSLIM)



- All-inclusive: Comes with everything you need for hassle-free installation.
- Ourable Build: Made from galvanized steel to ensure lasting stability and strength.
- Time-saving: Skip the wait for concrete plinths to cure and set up your tank instantly.

install, and moveable solution to make your installations more time and labour efficient.

- **Versatile:** Perfect for rental properties or when your client's needs change. Adjustable Feet: Designed for uneven surfaces to keep the tank secure and level
- Specifically designed for our 750L and 1000L Slimline Tanks, this stand offers a durable, easy-to-



20- and 40mm Water Tank Fill Valves

- (20MMFILLVALVE)
- NS (40MMFILLVALVE)



- Adjustable to levels ranging from 50mm to 2.5m
- Ideal for municipal and pump fed backup water storage tanks
- Reduces pump run time and start/stop operations
- Pressure range: 1 to 10 Bar

Allows for variable minimum and maximum water levels, a smart, efficient way to keep your water levels steady, protect your pump, and save on electricity. Designed for convenience and built to last, it's the upgrade your water system needs.

Low Profile Storage Tanks

Low Profile tanks are ideal for use when larger volumes of storage are required but height limitations are a factor.

Availability

Water Tank Colours Chemical Tank Colours







TANK	ТҮРЕ	SG	DIAMETER	HEIGHT	LID	CODE	AVAIL- ABILITY	WARRANTY
5 000L	Water Chemical Medium Chemical Heavy	SG 1 SG.1.4 SG.1.6	2 230mm 2 230mm 2 230mm	1 560mm 1 560mm 1 560mm	480mm 450mm Screw 450mm Screw	5000LPW 5000LPM 5000LPH	Non- Stock	10-year
10 000L *	Water Chemical Medium Chemical Heavy	SG 1 SG.1.4 SG.1.6	2 420mm 2 420mm 2 420mm	2 550mm 2 550mm 2 550mm	480mm 450mm Screw 450mm Screw	10000LPW 10000LPM 10000LPH	Non- Stock	10-year

Underground Water Storage Tank



TANK	ТҮРЕ	SG	DIAMETER	LENGTH	HEIGHT	LID	CODE	AVAILABILITY	WARRANTY
6 000L	Water	SG 1	1950mm	3 330mm	2 080mm	410mm	6000WU	NS Non-Stock	10-year

Other Water Storage Products



70L Water on Wheels

WOWK

Height: 380 mm Width: 570mm Length: 790 mm 2 x Thumb Plugs Included Note: wheelbarrow not included.





100L Water on Wheels

WOWG

Height: 480 mm Width: 570 mm Length: 790mm

Supplied with 250mm Screw Lid and a 20mm plastic tap.
Note: wheelbarrow not included.



NS 3-year Warranty





Communal Water Station

5 250L | WS5000LT 10 000L | WS10000LT

Includes a water tank, a 1.5m high-grade steel stand, all metal pipes and fittings, a convenien quick coupler system and six taps for easy access to the stored water.





Page no. 10 Page no.11

^{*} Transport costs apply

JoJo **Filtration Range**



JoJo **Filtration Range**

REFILL CARTRIDGES

Filter Bottle Cartridge

○ JJ-FILTER-W-1-Z

JJ-FILTER-B-1-Z

Height: 65 mm

S

Diameter: 30 mm



FILTERS



Filter Bottle

○ JJ-BOTTLE-W-1-Z JJ-BOTTLE-B-1-Z

Height: 235 mm Diameter: 70 mm

S 1-year Warranty



Inline Filter

JJ-RV01DR

Height: 270 mm (excl. clip-on hose connection) Diameter: 55 mm





Whole-house 2 -Stage **Filter Casing**

Height: 670 mm Width: 210 mm Length: 380 mm

S 1-year Warranty



Countertop Filter

JJ-CT-PPD2

Height: 320 mm Length: 220 mm

S 3-year Warranty



Scale & Corrosion Inhibitor

JJ-SI01

REMOVES

Height: 276 mm Width: 133 mm Length: 138 mm

S 1-year Warranty



Undersink Filter

JJ-US-PPD2

Height: 305 mm Width: 110 mm Length: 225 mm

S 3-year Warranty



Whole-house 1-Stage Filter Casing

JJ-WH20-1STAGE

Height: 670 mm Width: 210 mm Length: 380 mm

S 1-year Warranty

S

PP Sediment Cartridge

Suitable for use with the Countertop and Undersink Filter

JJ-PPRC5M

Height: 262mm

Diameter: 65 mm

20 Inch 5 Micron **PP Sediment Cartridge**

JJ-WHPP20

Height: 507 mm Diameter: 112 mm Suitable for use with the Whole-house Filter Casing

S

Filter Bottle Cartridge -

JJ-FILTER-MP20-A

Height: 65 mm Width: 170 mm Length: 205 mm

Multipack

S



Scale & Corrosion Inhibitor Replacement Crystals

JJ-SI01-R

Height: 520mm Width: 50mm Length: 160 mm

S



20 Inch PP Activated Carbon Cartridge

JJ-WHPPAC20

Height: 507 mm Diameter: 112 mm

Suitable for use with the Whole-house Filter Casing







Disruptor Cartridge

JJ-DRC

Height: 262mm Diameter: 65 mm Suitable for use with the Countertop and Undersink Filter







20 Inch 1 Micron **PP Sediment Cartridge**

JJ-WHPP20-1

Height: 507 mm Diameter: 112 mm Suitable for use with the Whole-house







20 Inch Scale Disruptor Cartridge

JJ-WHDR20

Height: 507 mm Diameter: 112 mm Suitable for use with the Whole-house Filter Casing







Electroadsorption to trap

various other contaminants

and remove viruses, bacteria and



What makes our filters different?

Our unique Disruptor ™ 5293 PAC-S Technology uses:



Anti-microbial silver

to disinfect



Powdered Activated

and improve the taste

Carbon to reduce odours



REMOVES

Page no. 12 Page no.13

Vertical Chemical Storage Tanks



TANK	ТҮРЕ	SG	DIAMETER	HEIGHT	LID	CODE	AVAIL- ABLITY	WARRANTY
260L	Chemical Medium Chemical Heavy	SG.1.4 SG.1.6	670mm 670mm	960mm 960mm	450mm Screw 450mm Screw	260M 260H	s Stock	3-year
500L	Chemical Medium Chemical Heavy	SG.1.4 SG.1.6	840mm 840mm	1 080mm 1 080mm	450mm Screw 450mm Screw	500M 500H	s Stock	3-year
1 000L	Chemical Medium Chemical Heavy	SG.1.4 SG.1.6	1 110mm 1 110mm	1 300mm 1 300mm	450mm Screw 450mm Screw	1000M 1000H	s Stock	10-year
1 500L	Chemical Medium Chemical Heavy	SG.1.4 SG.1.6	1 410mm 1 410mm	1 200mm 1 200mm	450mm Screw 450mm Screw	1500M 1500H	s Stock	10-year
2 700L	Chemical Medium Chemical Heavy	SG.1.4 SG.1.6	1 420mm 1 420mm	1860mm 1860mm	450mm Screw 450mm Screw	2700M 2700H	s Stock	10-year
5 250L	Chemical Medium Chemical Heavy	SG.1.4 SG.1.6	1 820mm 1 820mm	2 255mm 2 255mm	450mm Screw 450mm Screw	5250M 5250H	s Stock	10-year
5 500L	Chemical Medium Chemical Heavy	SG.1.4 SG.1.6	1900mm 1900mm	2 240mm 2 240mm	450mm Screw 450mm Screw	5500M 5500H	Special Order	10-year
10 000L	Chemical Medium Chemical Heavy	SG.1.4 SG.1.6	2 200mm 2 200mm	3 150mm 3 150mm	450mm Screw 450mm Screw	10000M 10000H	s Stock	10-year
15 000L * **	Chemical Medium Chemical Heavy	SG.1.4 SG.1.6	2 600mm 2 600mm	3 260mm 3 260mm	450mm Screw 450mm Screw	15000M 15000H	NS Non -Stock	10-year
20 000L * **	Chemical Medium Chemical Heavy	SG.1.4 SG.1.6	2 600mm 2 600mm	4 270mm 4 270mm	450mm Screw 450mm Screw	20000M 20000H	NS Non -Stock	10-year

Note: JoJo Tanks are specifically designed for different purposes. Contact us for recommendations and guidelines for your specialised chemical grading requirements.

Availability

Standard Colours

Alternative Colours





Horizontal Storage Tanks Horizontal tanks are available in water, chemical medium and heavy formats in the following colours as Non-Stock items.



Availability

Water Tank Colours Chemical Tank Colours



NS O

TANK	ТҮРЕ	sc	HEIGHT	LENGTH	WIDTH	LID	CODE
240L	Medium*	SG 1.4	650mm	1 080mm	560mm	125mm Planter	240HORM
	Heavy	SG 1.6	650mm	1 080mm	560mm	125mm Planter	240HORH
500L	Medium*	SG 1.4	830mm	1 290mm	785mm	125mm Planter	500HORM
	Heavy	SG 1.6	830mm	1 290mm	785mm	125mm Planter	500HORH
600L	Medium*	SG 1.4	675mm	1 430mm	955mm	125mm Planter	600HORM
	Heavy	SG 1.6	675mm	1 430mm	955mm	125mm Planter	600HORHD
750L	Medium*	SG 1.4	715mm	1 520mm	955mm	125mm Planter	750HORM
	Heavy	SG 1.6	715mm	1 520mm	955mm	125mm Planter	750HORH
900L	Medium*	SG 1.4	925mm	1 495mm	1 000mm	125mm Planter	900HORM
	Heavy	SG 1.6	925mm	1 495mm	1 000mm	125mm Planter	900HORH
1 000L	Medium*	SG 1.4	1 030mm	1645mm	990mm	125mm Planter	1000HORM
	Heavy	SG 1.6	1 030mm	1645mm	990mm	125mm Planter	1000HORH
1500L	Medium*	SG 1.4	1 395mm	1900mm	1 100mm	450mm Screw	1500HORM
	Heavy	SG 1.6	1 395mm	1900mm	1 100mm	450mm Screw	1500HORHD
2 500L **	Water Medium* Heavy	SG 1 SG 1.4 SG 1.6	1 210mm 1 210mm 1 210mm	2 180mm 2 180mm 2 180mm	1 540mm 1 540mm 1 540mm	450mm Screw 450mm Screw 450mm Screw	2500HORW 2500HORM 2500HORHD
4 500L	Water	SG 1	1 430mm	2 320mm	2 070mm	450mm Screw	4500HORW
	Medium*	SG 1.4	1 430mm	2 320mm	2 070mm	450mm Screw	4500HORM
	Heavy	SG 1.6	1 430mm	2 320mm	2 070mm	450mm Screw	4500HORH
5 000L	Water	SG 1	1 530mm	2 600mm	2 060mm	450mm Screw	5000HORW
Croco-	Medium*	SG 1.4	1 530mm	2 600mm	2 060mm	450mm Screw	5000HORM
dile **	Heavy	SG 1.6	1 530mm	2 600mm	2 060mm	450mm Screw	5000HORH
5 500L	Water	SG 1	1 505mm	2 545mm	2 090mm	450mm Screw	5500HORW
	Medium*	SG 1.4	1 505mm	2 545mm	2 090mm	450mm Screw	5500HORM
	Heavy	SG 1.6	1 505mm	2 545mm	2 090mm	450mm Screw	5500HORH

^{*} If intended usage is for diesel/paraffin storage, ensure that the tank is fitted with a diesel seal - identified by its yellow nut.

Page no. 14 Page no.15

^{*} Transport costs apply

^{** 50%} Deposit required to confirm order

^{**} While the capacity remains the same, tank moulds differ slightly in the Western Cape and Eastern Cape for these units.

Agricultural Products

Silo tanks are available in chemical medium and heavy formats as Non-Stock items in natural white.



Availability

Standard Colours

Alternative Colours





SILO TANKS	ТҮРЕ	SG	DIAMETER	HEIGHT	LID	CODE
200L	Medium	SG 1.4	550mm Bottom 135mm	1165mm	n/a	BABY (S)
300L	Medium	SG 1.4	670mm Bottom 130mm	1175mm	n/a	BABY
1 200L	Medium	SG 1.4	1 110mm Bottom 300mm	1900mm	450 Screw	1200SM
3 000L	Medium	SG 1.4	1 560mm Bottom 290mm	2 260mm	450 Screw	3000SM
5 000L	Medium	SG 1.4	1800mm Bottom 340mm	2 810mm	450 Screw	5000SM
17 000L * **	Medium	SG 1.4	2 600mm	4 430mm	450 Screw	17000SM



17 000L * ** Medium	SG 1.4	2 600mm Bottom 340mm	4 430mm	450 Screw	17000SM
5 000L Medium	SG 1.4	1800mm Bottom 340mm	2 810mm	450 Screw	5000SM

SILO STANDS	DIAMETER	HEIGHT	FINISHES	CODE	AVAILABILITY
1 200L	1100mm	1800mm	Red Oxide	S/1200 SILO	NS Non-Stock
3 000L	1540mm	2 060mm	Red Oxide	S/3000 SILO	NS Non-Stock
5 000L	1800mm	2 060mm	Red Oxide	S/5000 SILO	NS Non-Stock
17 000L * **	2 600mm	2 060mm	Red Oxide	S/17000 SILO	NS Non-Stock



GRAIN SILOS	DIAMETER	HEIGHT	MANHOLE	CODE	AVAILABILITY
5 000L	1800mm (tank only)	5 000mm (total height)	450mm	5000GS	NS Non-Stock
17 000L * **	2 600mm (tank only)	6 250mm (total height)	450mm	17000GS	NS Non-Stock





17 000L Grain Silo in Natural White



- Medium duty (SG 1.4) Silo Tank
- A high-grade steel stand
- Convenient ladder for easy access (with swing arm and back rest)
- 160mm sluice
- A silo bucket that holds approximately 20kg of mealies
- * Transport costs apply
- ** 50% Deposit required to confirm order





160L Sheep Trough

(1DT)

Height: 505 mm Width: 430 mm Length: 2 110 mm Float Valve included





Haysaver (HS)

Height: 790 mm Width: 705 mm





250L Cattle Trough (250LTB)

Height: 490 mm Width: 830 mm Length: 1290 mm Float Valve included & Outlet fitted with a Thumb End Plug





Fish Breeding Tank (VISDAM)

Litre: 710

Height: 770 mm Diameter: 1064 mm





(500LTB)

Height: 560 mm Width: 950 mm





500L Cattle Trough

Length: 1700 mm Float Valve included & Outlet fitted with a Thumb End Plug





Owl House

(OWL)

Height: 425 mm (base to top of gable) Width: 455 mm Length: 545 mm









6L Animal Feeder

(PERDE)

S

Height: 190 mm

Width: 440 mm

Length: 580 mm


Dustbin on Wheels

(ASBLIKBL)

Litre: 240L Height: 1 080 mm Width: 580 mm Length: 715 mm







Agricultural Products





Garden and Home Products

















Industrial Dustbin (ASBLIK)

Litre: 240L Height: 1170mm Diameter: 630 mm



50L | (50LT) 90L | (90LT) 210L | (210LT)



Screw-on-Lid Drums



S





Storage Drum

260L | (260S)



(BLWINE)

Height: 380 mm

20L Beverage Tank





500L Backwash Tank

(500BW)

Height: 1 080 mm

Diameter: 840 mm





Diameter: 535 mm Length: 1110 mm (longest side)





Raft Float - Middle Cone (FLOAT)

Diameter: 530 mm

Length: 1180 mm





Clip-on-Lid Drums

100L | (100LTC)

Wheelbarrow Liner

(WA)

Height: 250 mm (highest side) Height: 170 mm (lowest side) Length: 790 mm





Buoy (BOEIE)

Diameter: 300 mm Length: 950 mm





Small Dog Kennel (KENS)

Height: 505 mm (door 290 mm) Width: 482 mm (door 210 mm) Length: 575 mm

S 3-year Warranty

20L Savings Tank

(SPAAR)

Height: 350 mm

NS 1-year Warranty



Medium Dog Kennel (KENM)

Height: 785 mm (door 480 mm) Width: 710 mm (door 360 mm)

Length: 860 mm





Extra Large Dog Kennel

(KENEX)

Height: 1110 mm (door 700 mm) Width: 950 mm (door 500 mm) Length: 1320 mm





(HONDEX)

Height: 1 030 mm (door 875 mm) Diameter: 1390 mm









Mini Savings Tank (MTC)

Height: 230 mm Diameter: 200 mm





Mini Slimline Tank (MINIS)

Height: 330 mm Diameter: 140 mm



Page no. 18 Page no.19

Sanitation Products





TANK	ТҮРЕ	SUITABLE	DIAMETER	LENGTH	HEIGHT	LID	CODE	AVAILABILITY
1 250L	Septic Conservancy	2-4 People	1 550mm 1 550mm	n/a	1 190mm 1 190mm	290mm 290mm	1250SEP 1250SEPH	S Stock
1 500L	Septic Conservancy	2-6 People	1 550mm 1 550mm	n/a	1 280mm 1 280mm	290mm 290mm	1500SEP 1500SEPH	S Stock
1 750L	Septic Conservancy	4-6 People	1 550mm 1 550mm	n/a	1 390mm 1 390mm	290mm 290mm	1750SEP 1750SEPH	S Stock
2 000L	Septic Conservancy	4-7 People	1 550mm 1 550mm	n/a	1 500mm 1 500mm	290mm 290mm	2000SEP 2000SEPH	S Stock
2 500L	Septic Conservancy	4-9 People	1 550mm 1 550mm	n/a	1 710mm 1 710mm	290mm 290mm	2500SEP 2500SEPH	S Stock
6 000L	Septic Conservancy	20-25 People	1 950mm 1 950mm	3 330mm 3 330mm	2 080mm 2 080mm	410mm 410mm	6000 6000SHD	S Stock


What is the difference between Septic & Conservancy Tanks?

Septic Tank

A septic tank is used for the **disposal of sewerage only**. It brings about the digestion of organic matter and **discharges the black water into a French drain** to soak away into the ground over time. It requires minimum maintenance, as each component has a specific function and is designed accordingly.

Conservancy Tank

As it is chemical-resistant, a conservancy tank is used for the disposal of both black and grey water. It serves as temporary storage only, requiring the waste to be pumped out whenever the tank is full. This is done by licensed hauling companies who dispose of the waste accordingly.



Note: JoJo manufactures its septic and conservancy tanks from recycled plastic in order to reduce destructive waste output. They are therefore not suitable for the storage of water for potable purposes.



1250L to 2500L Septic/Conservancy Tanks



Pit Toilets & Pedestals

Pit toilets and pedestals are used in areas without regular sewerage removal and limited access to water. This typically includes informal settlements, farms and environmentally sensitive locations.









Pit Pedestal Omega 1PIT

Height: 455 mm Width: 500 mm Length: 540 mm Seat included





Pit Pedestal VIP 200 2PIT

Height: 510 mm Width: 340 mm Length: 460mm

Length: 460mm Seat not included, available separately at R102.00





Pit Pedestal VIP 450

Height: 485 mm

Width: 430 mm Length: 540 mm Seat not included, available separately at RIO2.00





Pit Toilet & Pedestal (Complete)

1TOI

Total Height: 2 120 mm
Total Width: 1 110 mm
Total Length: 1 340 mm
Complete With 1 Toilet Hut, 1 x Pit Pedestal





Chemical Mobile Toilets & Pedestals

Mobile or Chemical Toilets are ideal for building and construction sites, or any event where a temporary toilet solution is required.



Chemical Toilet Drum with Clip-on-Lid

CHEM

Height: 445mm Diameter: 536 mm





Chemical Toilet Drum with Clip-on-Seat

CHEM(S)

Height: 495 mm Diameter: 536 mm





Chemical Mobile Toilet (Complete)

CHEMCPL

Total Height: 2 120 mm Total Width: 1 110 mm Total Length: 1 340 mm

 $Complete\ with 1\ x\ Toilet\ Hut, 1\ x\ Chemical\ Toilet\ Drum\ with\ Clip-on-Lid\ \&\ 1\ x\ Chemical\ Toilet\ Drum\ with\ Clip-on-Seat.$





Toilet Hut 2TOI

Total Height: 2 120 mm
Total Width: 1 110 mm
Total Length: 1 340 mm
Supplied without a hole in the hut floor.

S 3-year Warranty




Page no. 20 Page no. 21

Rainwater Harvesting Accessories



Specifically designed for South African conditions, our range is versatile, simple to install and ideal for any setup.

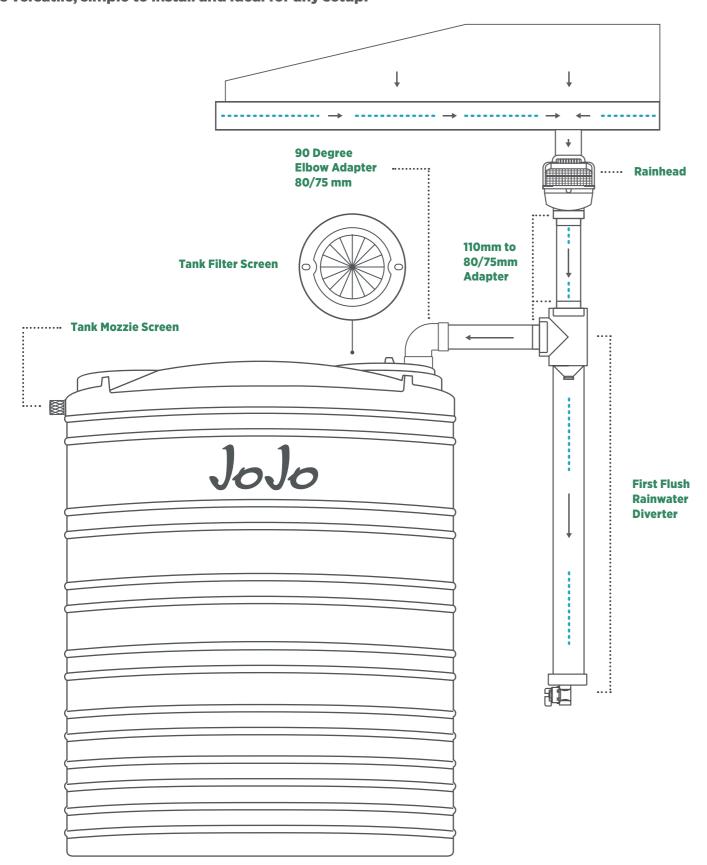

ACCESSORY	ТҮРЕ	APPLICATION	CODE	AVAILABILITY
	Rainhead	Directs leaves and debris away from the flow of water when harvesting rainwater.	RAINHEAD	S Stock
	First Flush Rainwater Diverter	Flushes away the initial, most contaminated flow of rainwater and directs clean water to your tank.	FIRSTFLUSH	s Stock
daib	110mm to 80/75mm Adapter Min. Order Qty is 12	Acts as an adapter to connect 80mm or 75mm pipes to a JoJo rainhead or first flush rainwater diverter.	RWHADAPTER	S Stock
	90 Degree Elbow Adapter 80/75mm Min. Order Qty is 8	Allows you to connect a 80 or 75mm pipe and can also act as an adapter between the two sizes.	90ELBOW80/7	5 S Stock
	480mm Water Tank Filter Screen	A stainless steel filter screen fitted beneath your 480mm water tank lid, this filter screen keeps out small debris and insects.	L480FS	S Stock
	480mm Plastic Filter Screen	A plastic filter screen that is fitted beneath your 480mm water tank lid to keep out debris. Note: the debris needs to be removed frequently.	L480.LT	NS Stock
	450mm Water Tank Filter Screen	Fitted beneath your 450mm water tank lid, this filter screen keeps out small debris and insects.	L450.S	S Non-Stock
	Tank Mozzie Screen Min. Order Qty is 12	A 40mm Tank Mozzie Screen that is fitted to your overflow or inlet to mosquito-proof your JoJo water tank.	MOZ	S Stock

Page no. 22

JoJo Accessories




кітѕ	ТҮРЕ		CODE	APPLICATION
	Water Tank Float Valve Kit	This kit allows for effortless filling of a JoJo water tank with an automatic shut-off.	FLOATKIT	



Pump to Tank Connector Kit permitting seamless connection from tank to pump. Suitable for use with our 0.37 and 0.75 kw booster pumps.

An all-

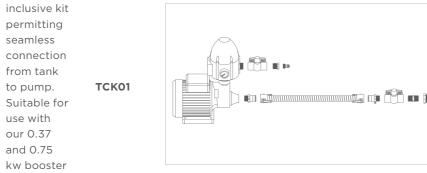

WATER LEVEL MONITORS	TYPE	APPLICATION	CODE	AVAILABILITY
	JoJo Monitor Tank Level	The IoT Tank Level device measures the water level via a sensor and sends the data to the JoJo Monitor app on your mobile device.	IOTLEVEL	S Stock
	Remote Tank Pump Controller	The Remote Tank Pump Controller monitors and controls the water levels for remote tank installations.	REMOTETPC	S Stock
Rain & Harvesting	Tank Level Gauge	A manual gauge that lets you monitor water tank levels at any time.	GAU	S Stock

LIDS	ТҮРЕ	CODE	TAPS	ТҮРЕ	CODE
	480mm Clip-on-Lid	L480.1	1	Plastic Tommy Tap (20mm)	PKT
фф	480mm Clip-on-Lid E-clips Note: packaged fitting Min. Order Qty is 22.	ECL Packaging excluded L480.2 Packaging included	voltee	Brass Slimline Tap (20mm)	КВВТ
906	450mm Screw-on-Lid (Complete)	L450.C		Solid Brass Lockable Tap (20mm)	KRb
	125mm Planter Lid	L125.1		Nickel Plated Lockable Tap (20mm)	KSS

REDUCERS	ТҮРЕ	CODE
	40/20mm Male/ Female Reducer Note: packaged fitting Min. Order Qty is 10.	RD40.20 Packaging excluded SR40.20 Packaging included
	50/40mm Full Thread Male/Female Reducer Note: packaged fitting Min. Order Qty is 9.	RD50.40 Packaging excluded SR50.40 Packaging included

Page no. 24 Page no.25

JoJo Accessories



CONNECTORS	ТҮРЕ	CODE	FITTINGS	ТҮРЕ	CODE
	Male Tank Connectors 15mm 25mm 40mm 50mm	TC015.1 TC025.0 STC040.1 STC050.0		15mm Female Water Tank Fitting	TC015.5
	Male/Female Tank Connectors 40/25mm 50/40mm	TC040.7 STC050.0		20mm Female Water Tank Fitting Note: packaged fitting Min. Order Qty is 11.	WF20 Packaging excluded STC20 Packaging included
	Male/Female Tank Connector Long Series 50/40mm	TC050.LN		20mm Female Water Fitting 2-Way	TCO25.B
	Male/Female Tank Connector with Elbow Long Series 50/40mm	TC050.EL/T		40mm Female Water Fitting Note: packaged fitting Min. Order Qty is 8.	WF40 Packaging excluded STC040.8.3 Packaging included
	Male Tank Connector 75mm	TC075.0	VERTICAL WA	TER TANK STANDS	CODE
	Male Tank Connector Long Series 75mm	TC075.LN		5000L 1.5m 3m 4.5m 6m 9m	S/1.5 5000 S3/5000 S4.5/5000 S6/5000 S9/5000
	Diesel/Paraffin Tank Connectors 40mm 50mm 75mm	TC040.D TC050.D TC075.D		10 000L 1.5m 3m 4.5m 6m	S/1.5 10000 S3/10000 S4.5/10000 S6/10000

9m

S9/10000