


## USING JOJO'S PUMP & TANK CONNECTOR KIT

Converts your water supply from your tank to a pressurised solution

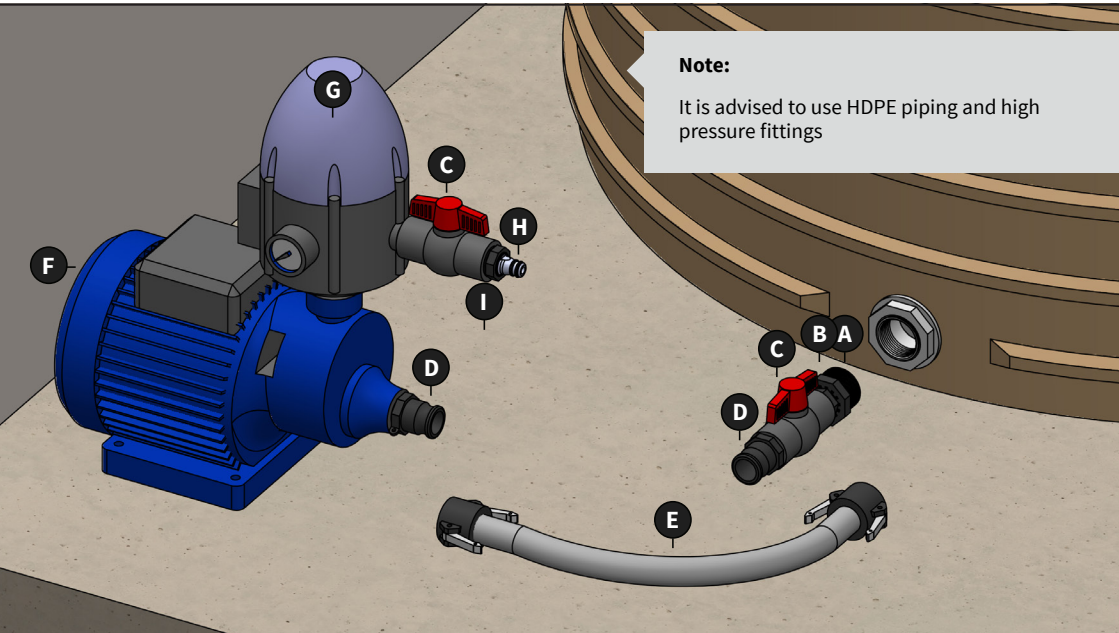

### APPLICATION & ASSEMBLY

**01**

Screw ball valve assembly (A,B,C & D) into existing tank fitting

**02**

Screw additional 25mm male coupler (D) into the pump (F)

**03**

Screw remaining ball valve assembly (C,H & I) onto pressure control valve (G)

**04**

Attach hose assembly (E) onto the male couplers (D)

**05**

Connect hosepipe to accessory adaptor (H)

**06**

Open both ball valves (C) to release water supply

**07**

Plug electrical cord into power supply and switch on to activate pump


**08**

To stop pump close ball valve (C) connected to control valve (G)



## USING JOJO'S PUMP & TANK CONNECTOR KIT

Supplies sufficient pressure for standard domestic use

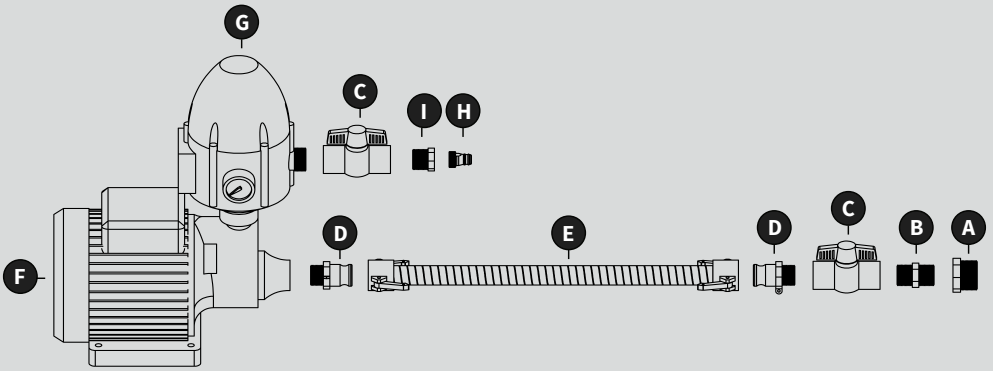

### WHAT'S IN THE BOX?

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li><b>A</b> 40/25mm Reducer</li> <li><b>B</b> 25mm Barrel Nipple</li> <li><b>C</b> 2 x 25mm Ball Valves</li> <li><b>D</b> 2 x 25mm Polyprop Male Couplers</li> <li><b>E</b> Flexible Hose Assembly<br/>Hose + 2 x Female Polyprop Couplers</li> </ul> | <ul style="list-style-type: none"> <li><b>F</b> Pump</li> <li><b>G</b> Pressure Control Valve</li> <li><b>H</b> 20mm Accessory Adaptor</li> <li><b>I</b> 25/20mm Reducing Bush</li> </ul> |
|---|---|

### SEAMLESSLY CONNECT THE UNIT TO A VARIETY OF JOJO TANKS

#### NOTE:

All connections and fittings from tank to pump should not be less than 25mm  
Unit intended for clean water usage only

**It is advised to run the pump once a week to ensure proper functionality**

